

CYLINDRIX® III

MULTIPLE SEMI-RECESSED 3LT LED

C3SR-A14-3
3LT LED

APPLICATION:

Retail & commercial accent & display lighting

CONSTRUCTION:

Die-cast aluminum heat sink and lamp housing
Laser cut steel flange
Formed steel upper housing and mounting frame
Powder coat paint, custom colors available, consult factory
Passive cooled

ELECTRICAL:

Electronic constant current LED driver
120v or 277v input
Standard dimming down to less than 20%, available on 120v/277v with ELV or Triac (reverse phase) dimming equipment, consult factory for approved device list
Optional Lutron Hi-lume® or 0-10v dimming available
This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge damage is not covered by warranty.

OPTICS:

LED cluster
Color Temp Options: 2700K, 3000K, 3500K, 4000K
CRI: 83 typ. (2200K, 2700K, 3000K, 3500K, 4000K)
90+ typ. (2700K, 3000K)
CrispWhite LED available
R9 Values: 11 (83CRI), 55 (90+CRI)
Life: 50,000 hrs
Lumen Maintenance: >70% of initial lumens @ 50,000 hrs
Lumen Output (31w): SP 2,345; FL 2,227; WF 2,264
CBCP (31w): SP 18,677; FL 8,683; WF 4,223
LPW: Up to 75 lpw
0-45° x 40° tilt, 360° rotation
Beam Options: Spot 12°, Flood 25°, Wide Flood 40°
Field interchangeable spun aluminum reflectors

MOUNTING:

For use in T-Grid & sheet rock ceiling, max thickness 1"

LABELING:




For indoor use only





PROJECT:

TYPE:

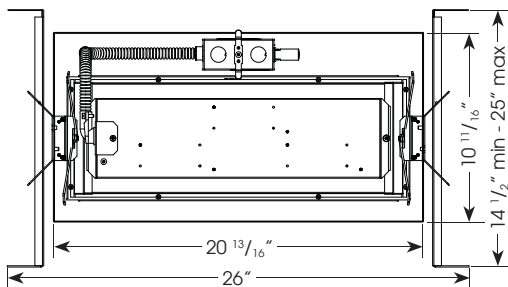

Ceiling cut out dimension: 7 1/8" x 19 5/16"

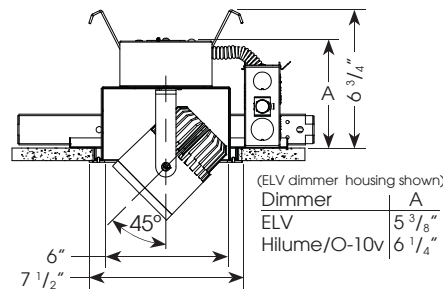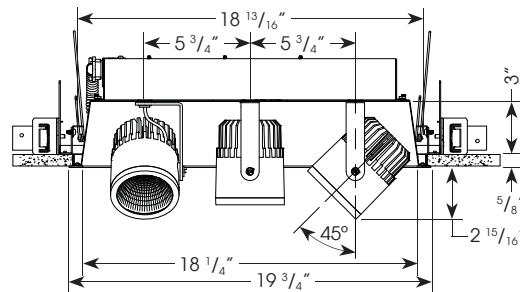

(ELV dimmer housing shown)
Dimmer A
ELV 5 3/8"
Hilume/O-10v 6 1/4"

Electrostatic sensitive device,
observe precautions for
handling



(see next page for details)

5 year limited
warranty
AMERLUX LED

(see website for details)

ELECTRICAL

Electronic driver

	3x16w		3x19w		3x23w		3x27w		3x31w	
	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps	System Watts	Amps
120v	48	0.40	57	0.48	69	0.58	81	0.68	93	0.78
277v	48	0.17	57	0.21	69	0.25	81	0.29	93	0.34

ORDERING INFORMATION:

Complete Unit Specification:

C3SR/SR-FRAME-A14-3-LED-120/C3SR-TRIM-A14-3-31-LED-WT-120/277-FL-FL-WT-30

Frame Only: C3SR/SR-FRAME-A14-3-LED-120

Trim Only: C3SR-TRIM-A14-3-31-LED-WT-120/277-FL-FL-WT-30

FRAME Model	# Heads	Lamp Type	Voltage	Options/ Accessories
C3SR/SR-FRAME-A14 3	3	LED	120 277	EM* - emergency battery pack 0-10V - 0-10v dimming HILUME - Lutron HI-lume® dimming CP - Chicago plenum

TRIM Model	# Heads	Wattage	Lamp Type	Housing/ Head Finish	Voltage	Beam Spread Head 1 Head 2 Head 3	Trim Ring Finish	Color Temp (CCT(K)-CRI)	Options/Accessories
C3SR-TRIM-A14	3	16 19 23 27 31	LED	WT - white texture BT - black texture ST - silver texture - (other RAL)	120/277	SP SP SP FL FL FL WF WF WF SP - spot, 15° FL - flood, 25° WF - wide flood, 40°	WT - white texture BT - black texture ST - silver texture	27 - 2700-83 30 - 3000-83 35 - 3500-83 40 - 4000-83 279 - 2700-90+ 309 - 3000-90+ CRISP - CrispWhite	0-10V - 0-10v dimming HILUME - Lutron HI-lume® dimming HEX - hexcell louver SL - linear spread lens, requires snoot CL - clear glass lens SOL - solite beam softening lens SN - snoot, 3/4" deep (required when more than 1 accessory is used) CB - cross blade, requires snoot EM* - emergency battery pack CP - Chicago plenum

*EM Is for 1 head only and not for CP option

Cat #:

Amerlux reserves the right to change details that do not affect overall function and performance.

QUICKSHIP CYLINDRIX® III

MULTIPLE SEMI-RECESSED 3LT LED

C3SR-A14-3
3LT LED



Amerlux® QuickShip makes it possible not only to keep up with expectations, but to keep ahead of them. We help enhance your competitive edge, ensuring you can start installation more quickly than you thought possible.

We can ship within 5-10 business days of your Amerlux QuickShip order, depending upon the selection.

- **QuickShip must be clearly marked on all P.O.'s.**
- **Must note on P.O. if requesting frames ship first.**
- **Standard shipping terms apply.**
- **See terms & conditions below.**

Quantity: 100 pieces or less
Frames: 5 days
Trims: 10 days

PROJECT:

TYPE:

QUICKSHIP ORDERING INFORMATION:

Frame:				Trim:										
Model	Heads	Lamp Type	Volts	Model	Heads	Watts	Lamp Type	Housing/ Head Finish	Volts	Beam Spread Head1	Head2	Head3	Trim Ring Finish	Color Temp (CCT(K)-CRI)
C3R/SR-FRAME-A14	3	LED	120/277	C3SR-TRIM-A14	3	16/19/23/27/31	LED	WT - white texture	120/277	SP FL WF	SP FL WF	SP FL WF	WT - white texture	30 - 3000-83 35 - 3500-83
										SP - spot, 15° FL - flood, 25° WF - wide flood, 40°				

Complete **QuickShip** Example: C3R/SR-FRAME-A14-3-LED-120/C3SR-TRIM-A14-3-16-LED-WT-120/277-SP-SP-SP-WT-30
Frame Example: C3R/SR-FRAME-A14-3-LED-120
Trim Example: C3SR-TRIM-A14-3-16-LED-WT-120/277-SP-SP-SP-WT-30

Cat #:

Terms & Conditions

1. For QuickShip processing, please submit QuickShip items on separate purchase order and indicate "QuickShip" on order.
2. Configurations outside of what is displayed on the QuickShip program are not available under the QuickShip lead times.
3. Please contact Customer Support to process orders with quantities larger than those listed.
4. Orders will be entered within 24 hours of receipt of a clean purchase order. Lead times are calculated by business days from time of sales order confirmation. Orders will ship within QuickShip lead times or sooner.
5. Change orders and order cancellations cannot be processed after sales order confirmation is generated.
6. For freight allowed (greater than \$3,000), order will ship complete based on longest lead time item. Please indicate on PO if Partial Shipments are approved and indicate freight method. For partial shipments under \$3,000, customer will be invoiced for freight.
7. All Lead times indicate when the fixture ships from Amerlux®. Arrival at destination is contingent upon carrier.

Expedite your orders by providing:

- Separate purchase order noting "QuickShip Program"
- Complete and accurate configurations
- Accurate pricing, quote number, shipping and contact information

Amerlux reserves the right to modify this program at any time.

CYLINDRIX® III

MULTIPLE SEMI-RECESSED 3LT LED

C3SR-A14-3
3LT LED



TYPE:




FIXTURE DATA: Multiplying Factors: 0.52 for 16w; 0.61 for 19w; 0.74 for 23w; 0.87 for 27w

Complete photometric data (ies format) available upon request.

Note: Data per head


31W LED

SPOT
DISTRIBUTION
LTL # 851724




Candelas at Nadir	
Deg	Candela
0	18677
5	13251
15	2560
25	952
35	228
45	12

FLOOD
DISTRIBUTION
LTL # 851725



Candelas at Nadir	
Deg	Candela
0	8683
5	7773
15	3031
25	1009
35	253
45	20

WIDE FLOOD
DISTRIBUTION
LTL # 851726




Candelas at Nadir	
Deg	Candela
0	4223
5	4139
15	2980
25	1658
35	323
45	26

APPLICATION DATA:

Notes and Definitions:

Beam spread is to 50% center beam candlepower (CBCP).
 D=Distance to floor or wall.
 FC=Footcandles on floor or wall at center beam aiming location.
 L=Effective Visual Beam length in feet (50% of maximum footcandle level).
 W=Effective Visual Beam width in feet (50% of maximum footcandle level).
 CB=Distance across or down to center beam location.

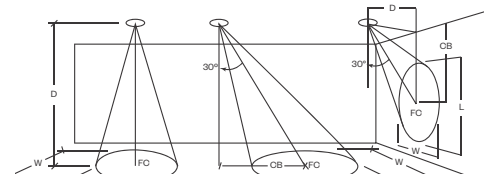

	0° Aiming Angle Horizontal Footcandles				30° Aiming Angle Horizontal Footcandles				30° Aiming Angle Vertical Footcandles				60° Aiming Angle Vertical Footcandles						
	D	FC	L	W	D	FC	L	W	CB	D	FC	L	W	CB	D	FC	L	W	CB
SPOT	5.0'	745	1.3	1.3	5.0'	463	1.7	1.4	3.0	3.0'	279	2.9	1.4	5.0	3.0'	1010	1.4	1.1	2.0
	7.5'	332	1.7	1.7	7.5'	221	2.4	2.0	4.0	4.0'	168	3.7	1.7	6.0	4.0'	723	1.5	1.2	2.0
	10.0'	187	2.6	2.6	10.0'	116	3.4	3.0	5.0	5.0'	108	4.3	2.4	8.0	5.0'	465	1.7	1.4	3.0
	12.5'	120	3.1	3.1	12.5'	79	4.0	3.5	7.0	6.0'	75	5.3	2.8	9.0	6.0'	322	2.2	1.6	3.0
FLOOD	5.0'	347	2.1	2.1	5.0'	217	2.8	2.5	3.0	3.0'	168	3.6	2.1	4.0	3.0'	524	2.2	1.4	2.0
	7.5'	154	3.2	3.2	7.5'	104	3.9	3.5	4.0	4.0'	93	4.7	2.9	5.0	4.0'	369	2.1	1.8	2.0
	10.0'	87	4.1	4.1	10.0'	59	5.2	4.7	5.0	5.0'	60	5.8	3.6	7.0	5.0'	218	2.8	2.5	3.0
	12.5'	56	5.2	5.2	12.5'	38	6.6	5.8	6.0	6.0'	42	7.1	4.3	8.0	6.0'	164	3.2	2.9	3.0
WIDE FLOOD	5.0'	169	3.4	3.4	5.0'	126	3.9	3.6	2.0	3.0'	118	3.6	3.0	3.0	3.0'	335	2.5	2.2	1.0
	7.5'	76	5.1	5.1	7.5'	56	5.9	5.4	3.0	4.0'	67	4.7	4.0	4.0	4.0'	189	3.3	3.1	2.0
	10.0'	43	6.8	6.8	10.0'	32	8.0	7.3	4.0	5.0'	43	6.1	5.0	5.0	5.0'	127	4.0	3.6	2.0
	12.5'	27	8.5	8.5	12.5'	20	10.0	9.2	5.0	6.0'	30	7.4	6.0	6.0	6.0'	84	5.0	4.6	3.0