

Lunetta

LED Walkway Bollard



LUN10-18/30/SDS



Features



LED integration throughout the site is possible with Amerlux's Lunetta bollard, which includes a highly efficient and long lasting LED array. A straight round 2.5" aluminum pole emanates from the ground and begins to flare until gracefully reaching the recessed light source running around the perimeter. The Lunetta bollard has no visible fasteners or hardware, which adds to its sleek design.

Product Overview

Wattage:	16W
Lumen Output:	1,420 lm (4,000K)
Color Temp:	2,700K / 3,000K / 3,500K / 4,000K
Dimming:	0-10v
Weight at 24in:	6 lbs
Max Height:	42 inches
Diameter:	10 inches

PROJECT:

TYPE:

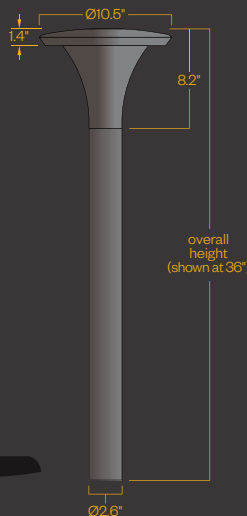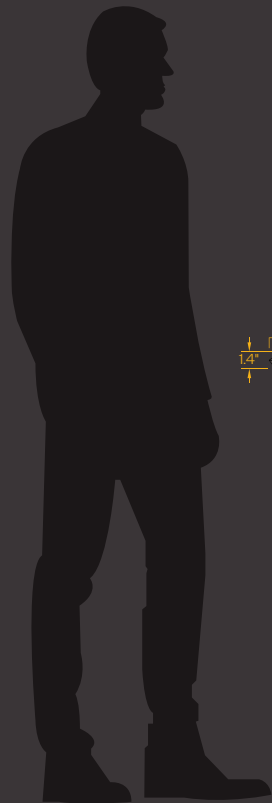

Description:

Lighting for exterior retail and hospitality environment, university and corporate campuses, or any outdoor meeting space.

LED Array:

(40) High brightness SMD LEDs delivering approximately 1,430 lm. Sealed under polycarbonate optical lens, resistant to UV and thermal shock. It runs at approximately 16W.

LED Driver Module:

- Electronic driver operates at 550mA with 120v-277V AC input
- 0-10v dimming

Materials:

Anchor base - Cast aluminum (356-T6)
 Shaft - Extruded aluminum (6063-T6)
 Cone - Spun aluminum (3003)

ETL listed, suitable for wet locations.

Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

- | | |
|------------------------------|------------------------------|
| ANT - Anthracite Gray | BLK - Satin Black |
| CLB - Classic Bronze | SDS - Stardust Silver |
| WHT - White | Custom _____ |



Lunetta

LED Walkway Bollard



PROJECT:

TYPE:

Ordering Information



1 Model

LUN10-18 - 18"

LUN10-24 - 24"

LUN10-30 - 30"

LUN10-36 - 36"

LUN10-42 - 42"

2 CCT

27 - 2,700K

30 - 3,000K

35 - 3,500K

40 - 4,000K

3 Finish

ANT - Anthracite Gray

BLK - Satin Black

CLB - Classic Bronze

SDS - Stardust Silver

WHT - White

Custom_____

Lunetta


LED Walkway Bollard



PROJECT:


TYPE:

Performance

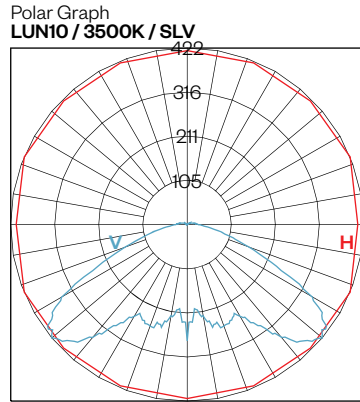


Maximum Candela = 421.68
 Located At Horizontal Angle = 22.5
 Vertical Angle = 50
 H - Horizontal Axial Candela
 V - Vertical Axial Candela
B1-U2-G1

Cutaway View

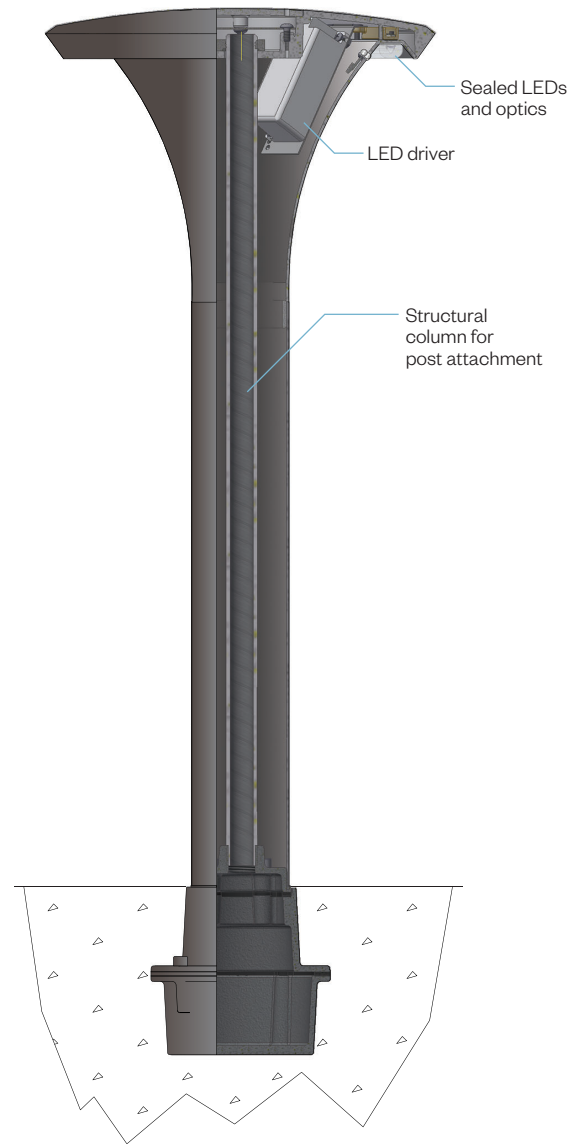

Anchorage Details

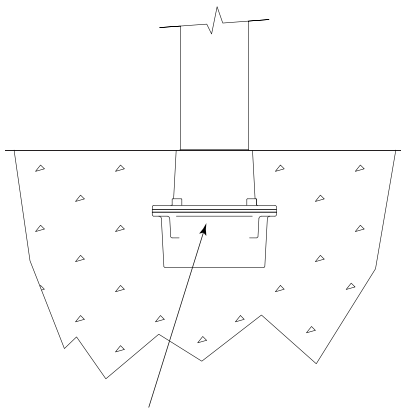

Subterranean, thick-walled sand cast aluminum junction box with two, 1/2" NPT threaded conduit openings in bottom standard, with access for wiring and inspection

Performance Chart

Overall Height	CCT	Approx. Lumens Delivered (With SDS finish)	Nominal Input Power
18 (18")	27 (2,700K)	1,310 lm	16W
24 (24")	30 (3,000K)	1,350 lm	
30 (30")	35 (3,500K)	1,380 lm	
36 (36")	40 (4,000K)	1,420 lm	
42 (42")			