

Passo CR

4" Soft Glow LED Recessed Wall Luminaire

Features

The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of two output levels to help tailor the desired illuminance to the project and a standard 0-10v dimmable driver allows even further flexibility.

Product Overview



Wattage:	Up to 5.4W
Lumen Output:	Up to 143 lm
Color Temp:	2,700K / 3,000K / 4,000K
Dimming:	0-10v down to 10%



PCCS4

PROJECT:

TYPE:

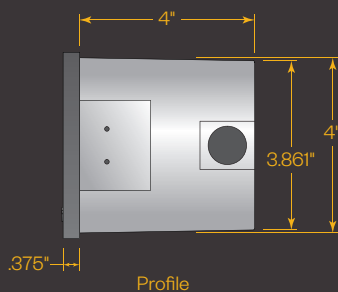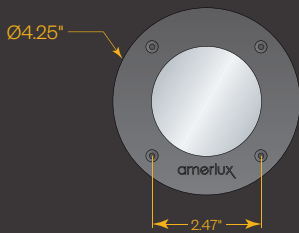

Application:

Designed for new construction in interior or exterior hollow walls or poured concrete.

Construction:

- Die-cast aluminum housing with protective powdercoat finish
- Sealed die-cast aluminum internal optical chamber
- Die-cast aluminum faceplate
- 1/8" tempered frosted glass lens

Driver:

- Drive Current (100, 175 or 350mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120v-277v auto-sensing
- 0-10v dimmable down to 10%

ETL listed, suitable for wet locations.

Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

Finish:

Premium quality thermoset polyester powdercoated faceplate for a durable finish.

ANT - Anthracite Gray
CLB - Classic Bronze
WHT - White

BLK - Satin Black
SLV - Silver
CSTM - Custom



Passo CR

4" Soft Glow LED
Recessed Wall Luminaire



PROJECT:

TYPE:

Luminaire Ordering Information

PCCS4 - -
1 **2** **3**

1 Model
PCCS4

2 Performance Code
L27 - 2,700K / 100mA
L30 - 3,000K / 100mA
L40 - 4,000K / 100mA
H27 - 2,700K / 175mA
H30 - 3,000K / 175mA
H40 - 4,000K / 175mA
VH27 - 2,700K / 350mA
VH30 - 3,000K / 350mA
VH40 - 4,000K / 350mA
AL - Amber Low
AH - Amber High

3 Finish
ANT - Anthracite Gray
BLK - Satin Black
CLB - Classic Bronze
SLV - Silver
WHT - White
CSTM - Custom

Back Box Ordering Information (Back Box must be ordered separately for a complete unit)

Model
CRBX-4

The backbox can be shipped ahead of the steplight upon request.

Passo CR


4" Soft Glow LED
Recessed Wall Luminaire



PROJECT:


TYPE:

Construction Detail

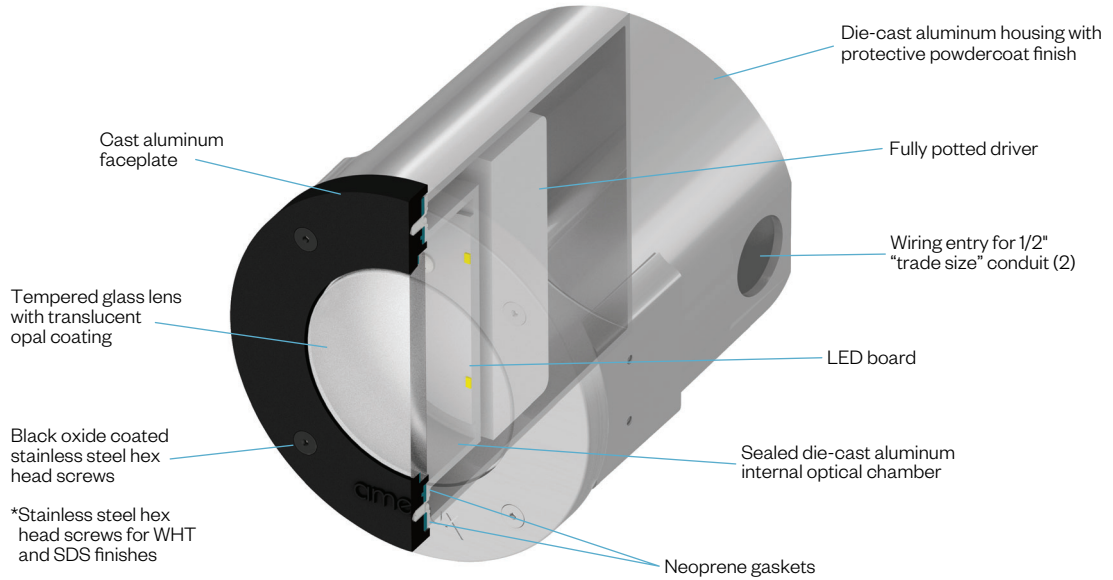


Application Brackets:

(Included)

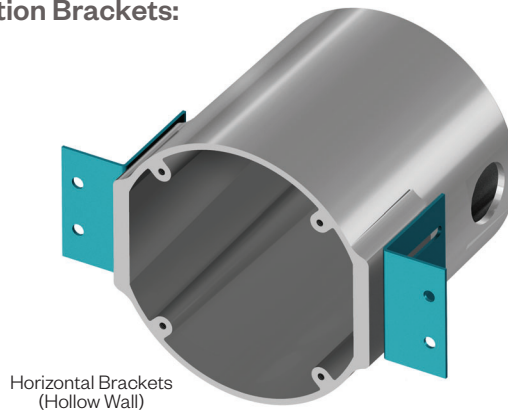

Performance Detail

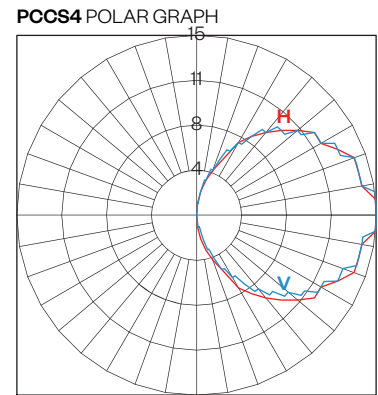

Performance Chart

Performance Code	CCT	Approx. Lumens	Drive Current	Nominal Input Power
L27	2700K	40	100mA	1.5W
L30	3000K	42		
L40	4000K	46		
H27	2700K	70	175mA	2.7W
H30	3000K	74		
H40	4000K	81		
VH27	2700K	124	350mA	5.4W
VH30	3000K	131		
VH40	4000K	143		