

# Passo CR

## 6" Soft Glow LED Recessed Wall Luminaire



PCCS6

### Features


The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of two output levels to help tailor the desired illuminance to the project and a standard 0-10v dimmable driver allows even further flexibility.

### Product Overview

Wattage:	Up to 12.6W
Lumen Output:	Up to 470 lm
Color Temp:	2,700K / 3,000K / 4,000K
Dimming:	0-10v down to 10%

### PROJECT:

### TYPE:

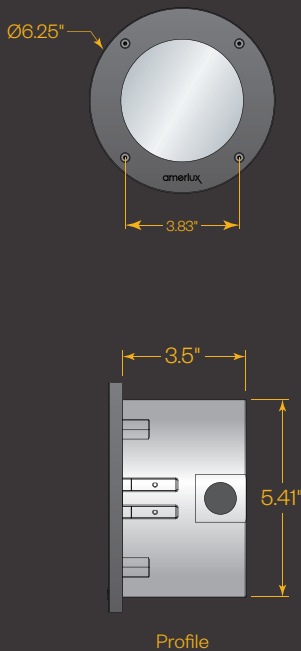

### Application:

Designed for new construction in interior or exterior hollow walls or poured concrete.

### Construction:

- Electrical grade cast aluminum housing
- Internal optical chamber
- Cast aluminum faceplate
- 1/8" tempered opal glass lens

### Driver:

- Drive Current (175, 350 or 700mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120v-277v auto-sensing
- 0-10v dimmable down to 10%

**ETL listed, suitable for wet locations.**

### Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

### Finish:

Premium quality thermoset polyester powdercoated faceplate for a durable finish.

- |                              |                          |
|------------------------------|--------------------------|
| <b>ANT</b> - Anthracite Gray | <b>BLK</b> - Satin Black |
| <b>CLB</b> - Classic Bronze  | <b>SLV</b> - Silver      |
| <b>WHT</b> - White           | <b>CSTM</b> - Custom     |



# Passo CR

6" Soft Glow LED  
Recessed Wall Luminaire



PROJECT:

TYPE:

## Luminaire Ordering Information



**1** Model  
**PCCS6**

**2** Performance Code  
**L27** - 2,700K / 175mA  
**L30** - 3,000K / 175mA  
**L40** - 4,000K / 175mA  
**H27** - 2,700K / 350mA  
**H30** - 3,000K / 350mA  
**H40** - 4,000K / 350mA  
**VH27** - 2,700K / 700mA  
**VH30** - 3,000K / 700mA  
**VH40** - 4,000K / 700mA  
**AL** - Amber Low  
**AH** - Amber High

**3** Finish  
**ANT** - Anthracite Gray  
**BLK** - Satin Black  
**CLB** - Classic Bronze  
**SLV** - Silver  
**WHT** - White  
**CSTM** - Custom

## Back Box Ordering Information (Back Box must be ordered separately for a complete unit)

Model  
**CRBX-6**

The backbox can be shipped ahead of the steplight upon request.

# Passo CR


6" Cast Aluminum Soft Glow LED  
Recessed Wall Luminaire



PROJECT:


TYPE:

## Construction Detail

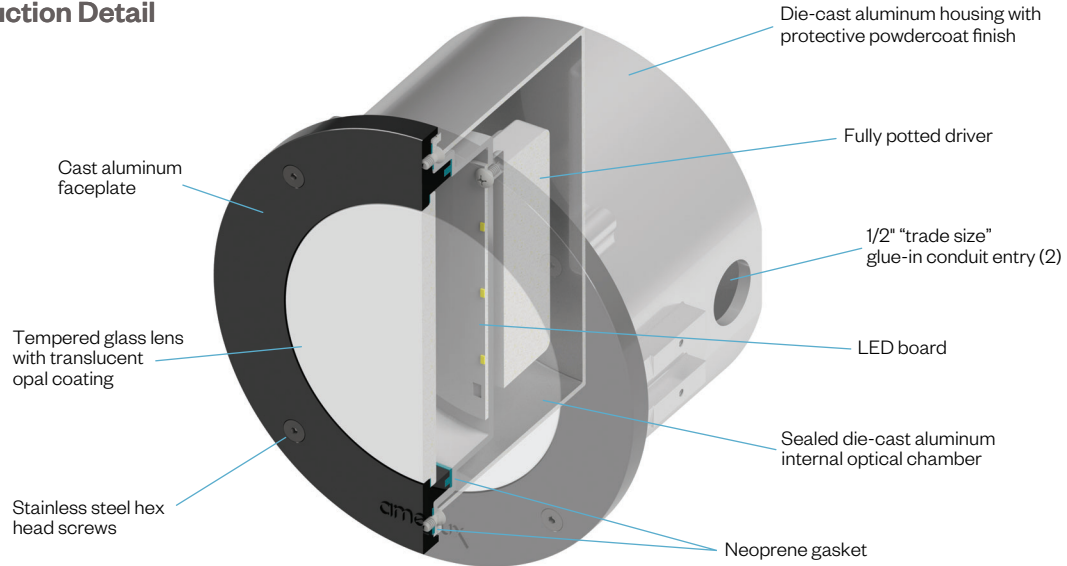


## Application Brackets:

(Included)

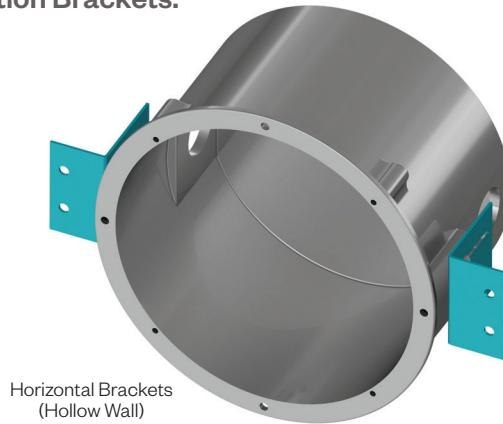

## Performance Detail

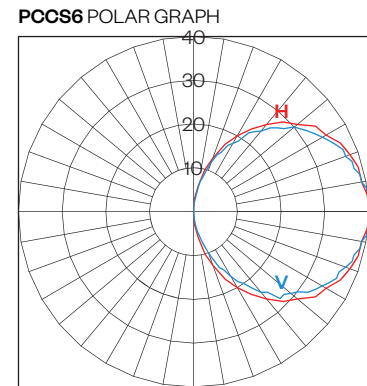

## Performance Chart

Performance Code	CCT	Approx. Lumens	Drive Current	Nominal Input Power
L27	2700K	118	175mA	3.4W
L30	3000K	124		
L40	4000K	133		
H27	2700K	236	350mA	6.3W
H30	3000K	248		
H40	4000K	265		
VH27	2700K	418	700mA	12.6W
VH30	3000K	439		
VH40	4000K	470		