

Passo CR

6" Stainless Steel Soft Glow
LED Recessed Wall Luminaire



PCSS6

Features


The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of two output levels to help tailor the desired illuminance to the project and a standard 0-10v dimmable driver allows even further flexibility.

Product Overview

Wattage:	Up to 12.6W
Lumen Output:	Up to 470 lm
Color Temp:	2,700K / 3,000K / 4,000K
Dimming:	0-10v down to 10%

PROJECT:

TYPE:

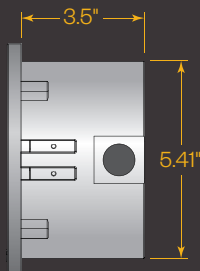

Profile

Application:

Designed for new construction in interior or exterior hollow walls or poured concrete.

Construction:

- Die-cast aluminum housing with protective powdercoat finish
- Sealed die-cast aluminum internal optical chamber
- Stainless steel faceplate (316L)
- 1/8" tempered glass lens with opal coating

Driver:

- Drive Current (175, 350 or 700mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120v-277v auto-sensing
- 0-10v dimmable down to 10%


ETL listed, suitable for wet locations.

Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

PCSG6

An optional crossguard faceplate is available. This faceplate must be specified at the time of order.

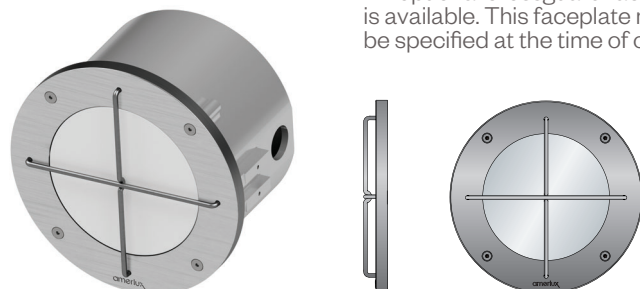

Passo CR


6" Stainless Steel Soft Glow LED
Recessed Wall Luminaire



PROJECT:

TYPE:

Ordering Information



1 Model
PCSS6
PCSG6

2 Performance Code
L27 - 2,700K / 175mA
L30 - 3,000K / 175mA
L40 - 4,000K / 175mA
H27 - 2,700K / 350mA
H30 - 3,000K / 350mA
H40 - 4,000K / 350mA
VH27 - 2,700K / 700mA
VH30 - 3,000K / 700mA
VH40 - 4,000K / 700mA

Back Box Ordering Information (Back Box must be ordered separately for a complete unit)

Model
CRBX-6

The backbox can be shipped ahead of the steplight upon request.

Passo CR

6" Stainless Steel Soft Glow LED
Recessed Wall Luminaire




Passo CR 6" Stainless Steel Soft Glow LED Recessed Wall Luminaire

PROJECT:


TYPE:

Construction Detail

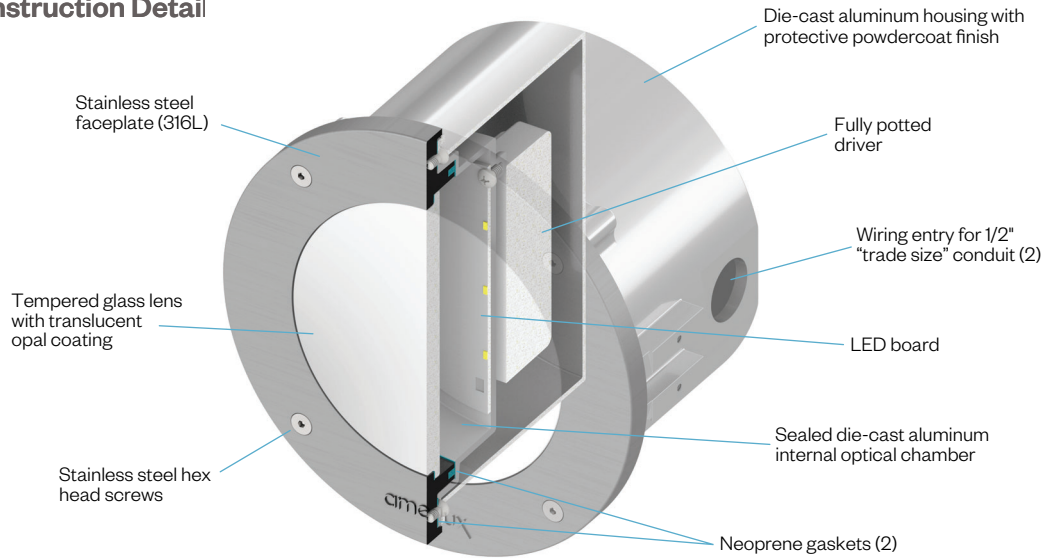


Application Brackets:

(Included)

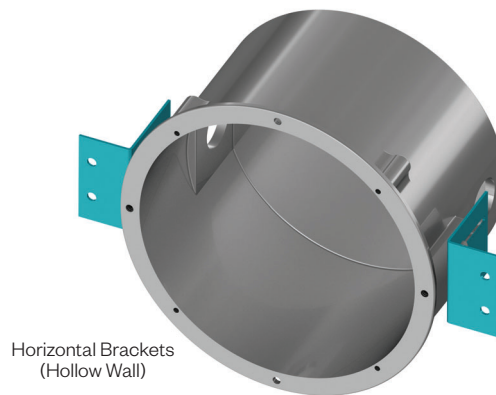

Performance Detail

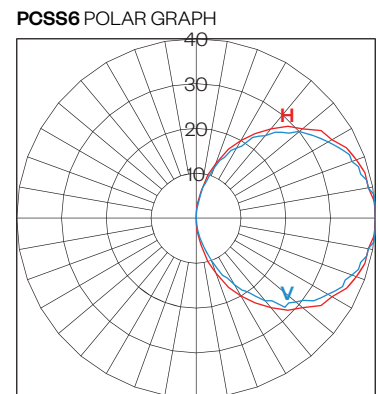

Performance Chart

Performance Code	CCT	Approx. Lumens	Drive Current	Nominal Input Power
L27	2700K	118	175mA	3.4W
L30	3000K	124		
L40	4000K	133		
H27	2700K	236	350mA	6.3W
H30	3000K	248		
H40	4000K	265		
VH27	2700K	418	700mA	12.6W
VH30	3000K	439		
VH40	4000K	470		