

# Passo SQ

6" Directional LED  
Recessed Wall Luminaire



PSCD6

## Features


The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of two output levels to help tailor the desired illuminance to the project and a standard 0-10v dimmable driver allows even further flexibility.

## Product Overview

Wattage:	Up to 16.2W
Lumen Output:	Up to 188 lm
Color Temp:	2,700K / 3,000K / 4,000K / AMBER
Dimming:	0-10v down to 10%

## PROJECT:

## TYPE:

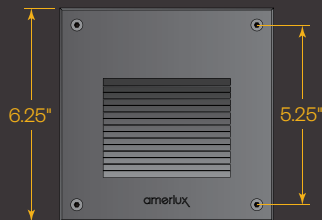

Profile

## Application:

Designed for new construction in interior or exterior hollow walls or poured concrete.

## Construction:

- Die-cast aluminum housing with protective powdercoat finish
- Sealed die-cast aluminum internal optical chamber
- Die-cast aluminum faceplate
- Solite™ 1/8" clear tempered solite glass lens

## Driver:

- Drive Current (175, 350 or 700mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120v-277v auto-sensing
- 0-10v dimmable down to 10%

**ETL listed, suitable for wet locations.**

## Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

## Amber option:

**PSCD6-AL:** 383.3mW  
**PSCD6-AH:** 300mW

## Finish:

Premium quality thermoset polyester powdercoated faceplate for a durable finish.

- |                              |                          |
|------------------------------|--------------------------|
| <b>ANT</b> - Anthracite Gray | <b>BLK</b> - Satin Black |
| <b>CLB</b> - Classic Bronze  | <b>SLV</b> - Silver      |
| <b>WHT</b> - White           | <b>CSTM</b> - Custom     |

# Passo SQ

6" Directional LED  
Recessed Wall Luminaire



PROJECT:

TYPE:

## Luminaire Ordering Information

PSCD6 - -  
**1**      **2**      **3**

**1** Model  
**PSCD6**

**2** Performance Code  
**L27** - 2,700K / 175mA  
**L30** - 3,000K / 175mA  
**L40** - 4,000K / 175mA  
**H27** - 2,700K / 350mA  
**H30** - 3,000K / 350mA  
**H40** - 4,000K / 350mA  
**VH27** - 2,700K / 700mA  
**VH30** - 3,000K / 700mA  
**VH40** - 4,000K / 700mA  
**AL** - Amber Low  
**AH** - Amber High

**3** Finish  
\* **ANT** - Anthracite Gray  
\* **BLK** - Satin Black  
\* **CLB** - Classic Bronze  
**SLV** - Silver  
**WHT** - White  
**CSTM** - Custom

## Back Box Ordering Information (Back Box must be ordered separately for a complete unit)

Model  
**SQBX-6**

The backbox can be shipped ahead of the steplight upon request.

# Passo SQ


6" Directional LED  
Recessed Wall Luminaire



PROJECT:


TYPE:

## Construction Detail

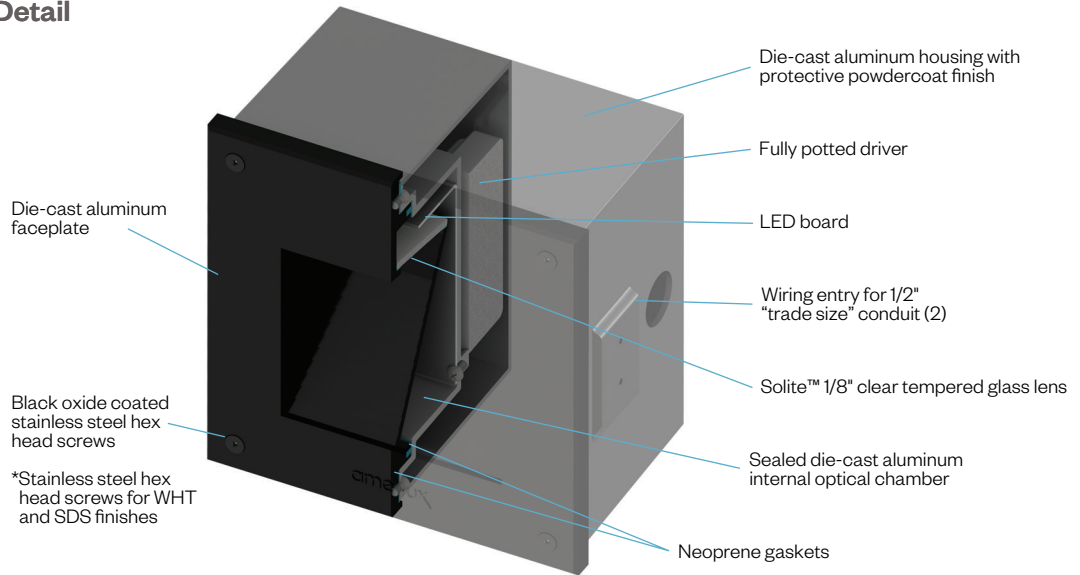


## Application Brackets:

(Included)

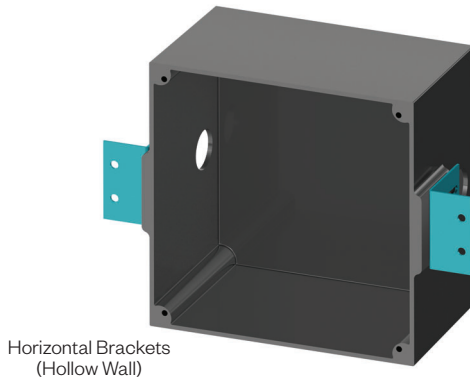

## Performance Detail

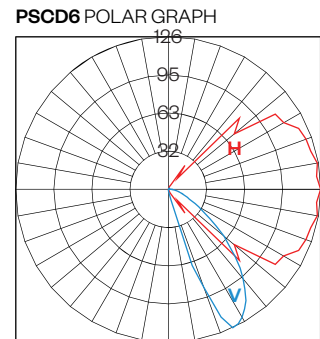

## Performance Chart

Performance Code	OCT	Approx. Lumens	Drive Current	Nominal Input Power
<b>L27</b>	2700K	68	175mA	4.2W
<b>L30</b>	3000K	71		
<b>L40</b>	4000K	76		
<b>H27</b>	2700K	95	350mA	8.1W
<b>H30</b>	3000K	100		
<b>H40</b>	4000K	106		
<b>VH27</b>	2700K	168	700mA	16.2W
<b>VH30</b>	3000K	177		
<b>VH40</b>	4000K	188		

## Amber Option

Model Code	Output
<b>PSCD6-AL</b>	383.3mW
<b>PSCD6-AH</b>	300mW