

Passo

12" LED STEPLIGHT (New Construction)

Features

Thoughtful design and attention to detail ensure the Passo LED Step Lights are truly one of a kind. Whether for new construction or retrofit applications, the Passo integrates LED technology and well proven construction techniques to deliver an extremely long lasting and virtually maintenance free light that enhances the safety and aesthetics of a project.






PSLT12/BK

Product Overview

Wattage:	8W
Lumen Output:	205 lm
Color Temp:	3,000K / 3,500K / 4,000K

PROJECT:

TYPE:

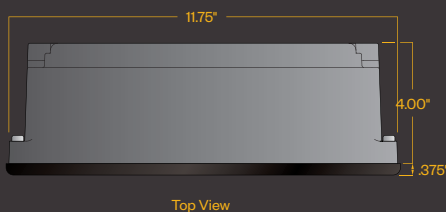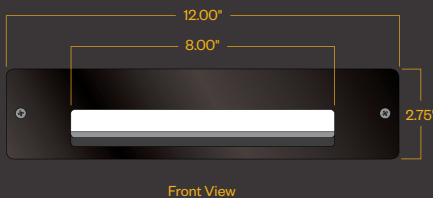

Application:

Designed for new construction in steps and wall-mounted applications.

Construction:

Stainless steel driver enclosure and bracketing. Machined brass internal endcaps for optical chamber. Anodized aluminum heatsink. Composite or stainless steel faceplate.

Driver:

Fully epoxy encapsulated for exceptionally cool operation and greatly extended life. Electronic constant voltage operation with over voltage and short circuit protection. 120 to 277v input. ELV dimmable at 120v only.

ETL listed, suitable for wet locations.

Optics:

LED module comprised of a closely packed array of small, discrete LED's that creates a uniform linear light source. Module and heat sink are enclosed in a cylindrical glass lens sealed with O-rings, to provide exceptional performance. Polished reflector directs the light outward uniformly.

Composite Colors:

- BG - Beige
- BK - Black
- GY - Dark Grey
- WH - White



Passo

12" LED Steplight (New Construction)




PROJECT:

TYPE:

Available Faceplates




Solid Color Composite
(Standard)

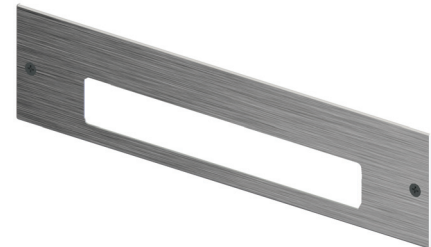


Stainless Steel (SS)

1/8" thick
304 Grade

Internal Detail

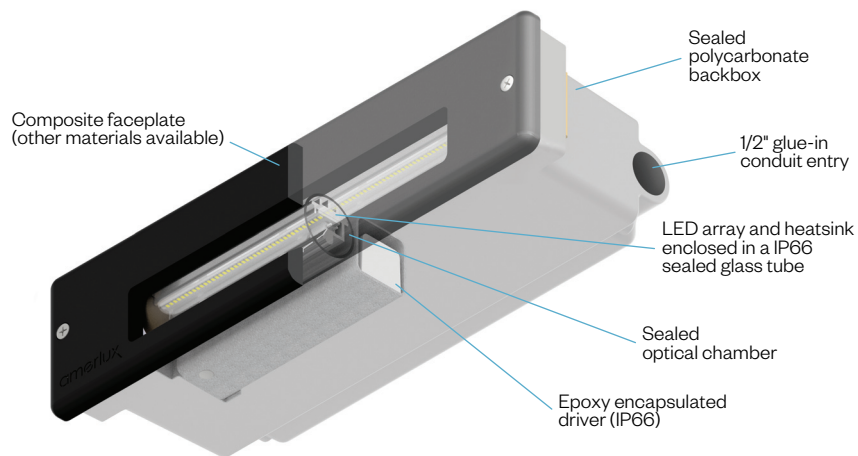

Performance Detail

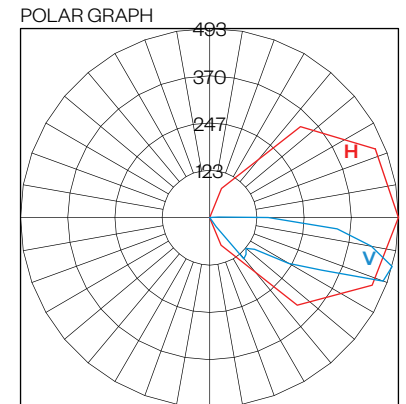

Maximum Candela = 493.36
Horizontal Angle = 0
Vertical Angle = 75

Ordering Information

Model	Faceplate Color	Ordering Code	OCT	Approx. Lumens	Total Efficacy	Nominal Input Power
PSLT12	BG - Beige	2F30	3000 K	344	43 Lm/W	8W
	BK - Black	2F35	3500 K	352	44 Lm/W	
	GY - Dark Gray WH - White	2F40	4000 K	410	51 Lm/W	
PSLT12-SS	Brushed Stainless Steel					

Ordering options shown as **BOLD**