


Round Straight Aluminum Pole

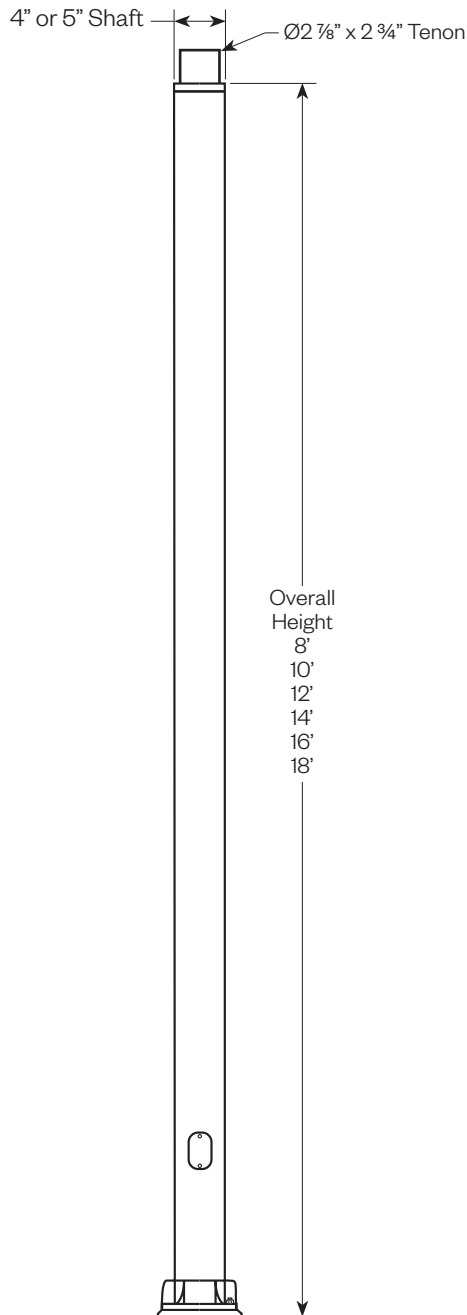

Specifications & Features:

- 4" or 5" shaft - 8' to 18' standard heights
- Straight poles

Extruded shaft is circumferentially welded to the base

Access door for anchor bolts and wiring is secured with stainless steel screws

Ground lug provided inside base

Materials:

Base - Cast aluminum (356-T6)

Shaft - Extruded Aluminum (6065-T5)

Anchor Bolts - Hot dipped galvanized steel,
ordered separately

Finish:

Premium quality thermoset polyester powder coat for a durable finish.



Amerlux reserves the right to change details that do not affect overall function and performance.

Amerlux®, LLC • P: 973-882-5010 • amerlux.com



Round Straight Aluminum Pole

Pole Ordering Information

1

2

3

1 Model

410-A/125 - 4" shaft, 10' mounting, .125 wall
412-A/125 - 4" shaft, 12' mounting, .125 wall
414-A/125 - 4" shaft, 14' mounting, .125 wall
416-A/125 - 4" shaft, 16' mounting, .125 wall
418-A/188 - 4" shaft, 18' mounting, .188 wall
510-A/125 - 5" shaft, 10' mounting, .125 wall
512-A/125 - 5" shaft, 12' mounting, .125 wall
514-A/125 - 5" shaft, 14' mounting, .125 wall
516-A/125 - 5" shaft, 16' mounting, .125 wall
518-A/125 - 5" shaft, 18' mounting, .125 wall

2 Finish

BLK - satin black
CLB - classic bronze
GBZ - gloss textured bronze
GRN - green
GTB - gloss textured black
TBK - textured black
TGR - gloss textured green
CSTM - custom, consult factory

3 Options/Accessories

GFCI-TOP - ground fault circuit protected outlet, placed 6" from the top of pole
GFCI-BTM - ground fault circuit protected outlet, placed 6" above the decorative base at the bottom of the pole
LT - less tenon

Anchor Bolt Ordering Information (Ordered separately, can be pre-shipped upon request)

1

1 Model

555-0018 - 3/4" x 17" anchor bolts

Accessory Ordering Information (Ordered separately)


1

1 Model

BA18-FRC4 - 18" banner arm, 4" OD shaft
BA18-FRC5 - 18" banner arm, 5" OD shaft
BA24-FRC4 - 24" banner arm, 4" OD shaft
BA24-FRC5 - 24" banner arm, 5" OD shaft
2BA18-FRC4-180 - double sided 18" banner arms, 4" OD shaft
2BA18-FRC5-180 - double sided 18" banner arms, 5" OD shaft
2BA24-FRC4-180 - double sided 24" banner arms, 4" OD shaft
2BA24-FRC5-180 - double sided 24" banner arms, 5" OD shaft
FPH-4 - flag pole holder for 4" pole
FPH-5 - flag pole holder for 5" pole

Amerlux reserves the right to change details that do not affect overall function and performance.

Round Straight Aluminum Pole

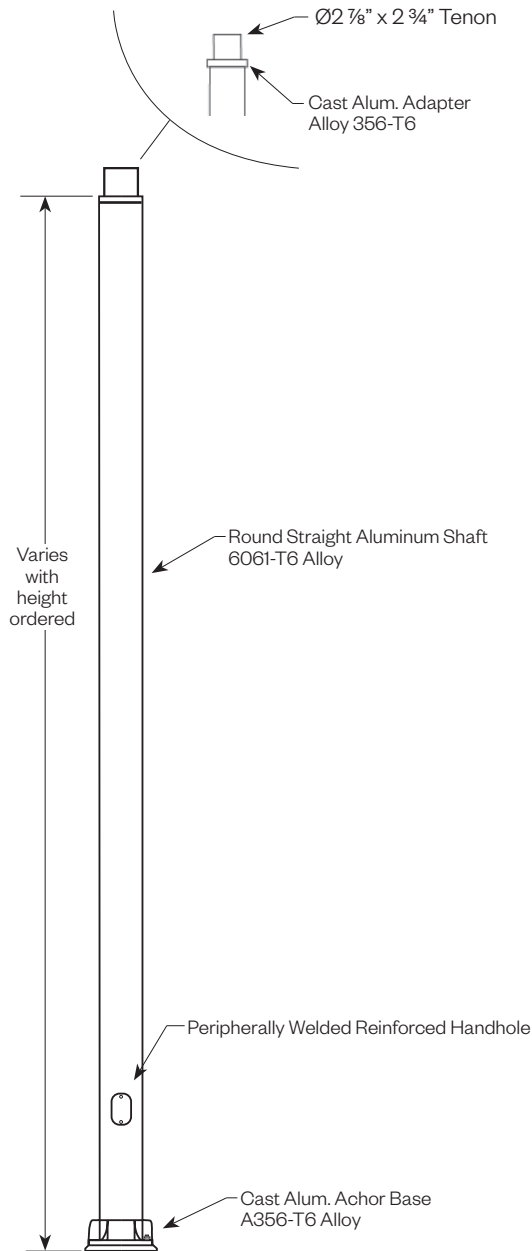

Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (additional charges apply).

- | | |
|------------------------------------|-----------------------------------|
| BLK - Satin Black | GTB - Gloss Textured Black |
| CLB - Classic Bronze | TBK - Textured Black |
| GBZ - Gloss Textured Bronze | TGR - Gloss Textured Green |
| GRN - Green | |

Accessories



Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or **BA24** (24") banner arms

FRC4 (4"OD shaft) or **FRC5** (5"OD shaft)

Add a (2) for a double arm. Example: **2BA18-FRC4-180**

See ordering guide for configurations



FPH-4/FPH-5

Extruded aluminum holder for 1" OD flag poles.

Available for 4" OD or 5" OD non-tapered pole.




GFCI - Top/Bottom

Covered ground fault circuit protected duplex outlet.

Can be placed near top of pole or above the decorative base at the bottom of the pole. Wet while in use rated.

GFCI Orientation Guide

As viewed from above





Note: GFCI placed at 0° unless otherwise specified.

Note: Orientation of additional accessories must be specified when ordering.

Anchor Base & Bolt Details

Anchor bolts and templates can be requested prior to product shipment.

| Pole Diameter | Bolt Circle | Bolt Projection | Conduit Opening | Base Size |
|---------------|-------------|-----------------|-----------------|-----------|
| 4" | 7-1/2" | 3-1/4" | 3-3/4" | 8-3/4" |
| 5" | 7-1/2" | 3-1/4" | 4-1/2" | 9-1/4" |



- (4) 3/4"-10NC Galv. Stl. Anchor Bolts, AASHTO M314-90 Grade 55, Galv. Per ASTM A153.
- (4) 3/4"-10NC Galv. Stl. Hex. Nuts
- (4) 3/4" Galv. Stl. Lockwashers
- (4) 3/4" Galv. Stl. Flatwashers

Amerlux reserves the right to change details that do not affect overall function and performance.