


# Round Straight Aluminum Pole

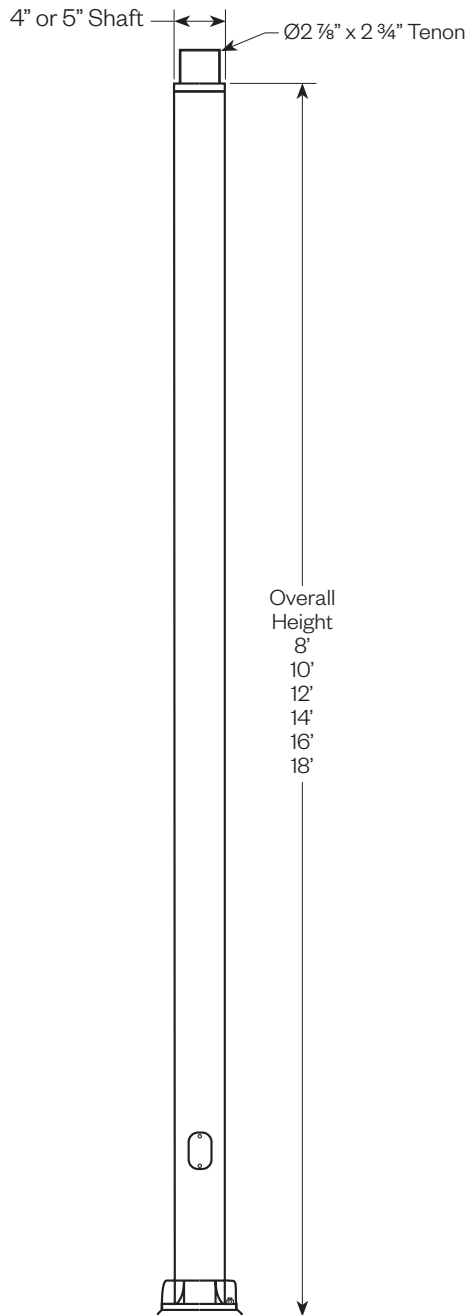

## Specifications & Features:

- 4" or 5" shaft - 8' to 18' standard heights
- Straight poles

Extruded shaft is circumferentially welded to the base

Access door for anchor bolts and wiring is secured with stainless steel screws

Ground lug provided inside base

## Materials:

Base - Cast aluminum (356-T6)

Shaft - Extruded Aluminum (6065-T5)

Anchor Bolts - Hot dipped galvanized steel,  
ordered separately

## Finish:

Premium quality thermoset polyester powder coat for a durable finish.



Amerlux reserves the right to change details that do not affect overall function and performance.

Amerlux®, LLC • P: 973-882-5010 • amerlux.com



# Round Straight Aluminum Pole

---

## Pole Ordering Information

---

**1**

**2**

**3**

---

### **1** Model

**410-A/125** - 4" shaft, 10' mounting, .125 wall  
**412-A/125** - 4" shaft, 12' mounting, .125 wall  
**414-A/125** - 4" shaft, 14' mounting, .125 wall  
**416-A/125** - 4" shaft, 16' mounting, .125 wall  
**418-A/188** - 4" shaft, 18' mounting, .188 wall  
**510-A/125** - 5" shaft, 10' mounting, .125 wall  
**512-A/125** - 5" shaft, 12' mounting, .125 wall  
**514-A/125** - 5" shaft, 14' mounting, .125 wall  
**516-A/125** - 5" shaft, 16' mounting, .125 wall  
**518-A/125** - 5" shaft, 18' mounting, .125 wall

### **2** Finish

**BLK** - satin black  
**CLB** - classic bronze  
**GBZ** - gloss textured bronze  
**GRN** - green  
**GTB** - gloss textured black  
**TBK** - textured black  
**TGR** - gloss textured green  
**CSTM** - custom, consult factory

### **3** Options/Accessories

**GFCI-TOP** - ground fault circuit protected outlet, placed 6" from the top of pole  
**GFCI-BTM** - ground fault circuit protected outlet, placed 6" above the decorative base at the bottom of the pole  
**LT** - less tenon

---

## Anchor Bolt Ordering Information (Ordered separately, can be pre-shipped upon request)

---

**1**

---

### **1** Model

**555-0018** - 3/4" x 17" anchor bolts

---

## Accessory Ordering Information (Ordered separately)

---

**1**

---


### **1** Model

**BA18-FRC4** - 18" banner arm, 4" OD shaft  
**BA18-FRC5** - 18" banner arm, 5" OD shaft  
**BA24-FRC4** - 24" banner arm, 4" OD shaft  
**BA24-FRC5** - 24" banner arm, 5" OD shaft  
**2BA18-FRC4-180** - double sided 18" banner arms, 4" OD shaft  
**2BA18-FRC5-180** - double sided 18" banner arms, 5" OD shaft  
**2BA24-FRC4-180** - double sided 24" banner arms, 4" OD shaft  
**2BA24-FRC5-180** - double sided 24" banner arms, 5" OD shaft  
**FPH-4** - flag pole holder for 4" pole  
**FPH-5** - flag pole holder for 5" pole  
**4SP-COV** - spun aluminum base cover for 4" OD Poles  
**5SP-COV** - spun aluminum base cover for 5" OD Poles

---

Amerlux reserves the right to change details that do not affect overall function and performance.

# Round Straight Aluminum Pole

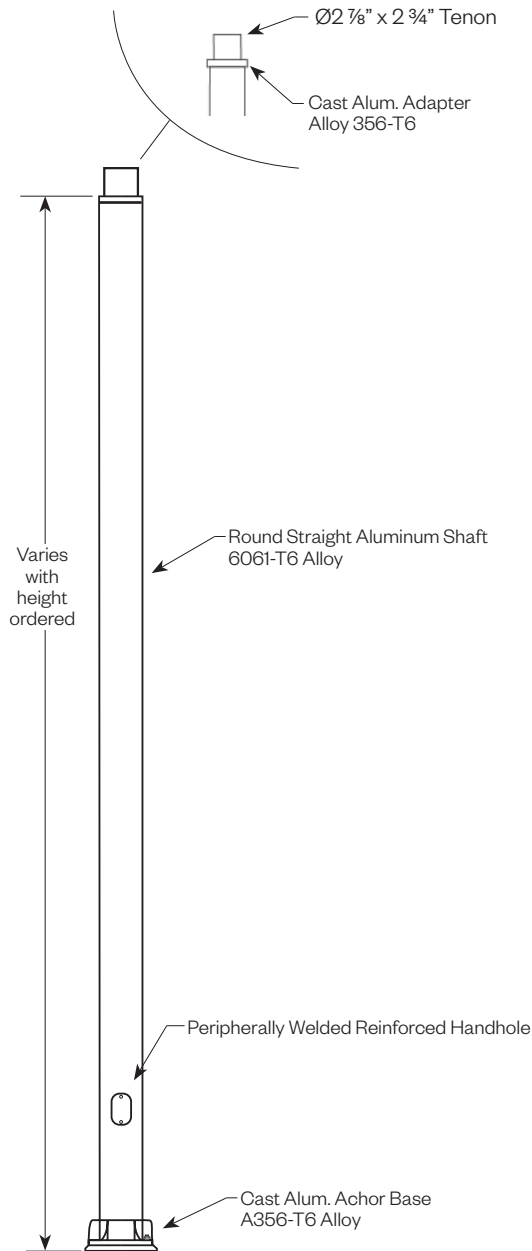

## Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (additional charges apply).

- |                                    |                                   |
|------------------------------------|-----------------------------------|
| <b>BLK</b> - Satin Black           | <b>GTB</b> - Gloss Textured Black |
| <b>CLB</b> - Classic Bronze        | <b>TBK</b> - Textured Black       |
| <b>GBZ</b> - Gloss Textured Bronze | <b>TGR</b> - Gloss Textured Green |
| <b>GRN</b> - Green                 |                                   |

## Accessories

### Banner Arms

Single or double sided field rotatable banner arms.

**BA18** (18") or **BA24** (24") banner arms

**FRC4** (4"OD shaft) or **FRC5** (5"OD shaft)

Add a (2) for a double arm. Example: **2BA18-FRC4-180**

**See ordering guide for configurations**



### FPH-4/FPH-5

Extruded aluminum holder for 1" OD flag poles.

Available for 4" OD or 5" OD non-tapered pole.



### GFCI - Top/Bottom


Covered ground fault circuit protected duplex outlet.

Can be placed near top of pole or above the decorative base at the bottom of the pole. Wet while in use rated.




### Spun Base Cover

Spun aluminum base cover. Not suitable for use with GFCI.



## GFCI Orientation Guide

As viewed from above





**Note: GFCI placed at 0° unless otherwise specified.**

**Note: Orientation of additional accessories must be specified when ordering.**

## Anchor Base & Bolt Details

Anchor bolts and templates can be requested prior to product shipment.

Pole Diameter	Bolt Circle	Bolt Projection	Conduit Opening	Base Size
4"	7-1/2"	3-1/4"	3-3/4"	8-3/4"
5"	7-1/2"	3-1/4"	4-1/2"	9-1/4"



- (4) 3/4"-10NC Galv. Stl. Anchor Bolts, AASHTO M314-90 Grade 55, Galv. Per ASTM A153.
- (4) 3/4"-10NC Galv. Stl. Hex. Nuts
- (4) 3/4" Galv. Stl. Lockwashers
- (4) 3/4" Galv. Stl. Flatwashers

Amerlux reserves the right to change details that do not affect overall function and performance.

