A Delta Group Company

Rook® 350 3.5" Square Pendants



High style, yet also versatile. Spare and modern, yet warm and welcoming. This striking Rook 350 re-imagines the Hornet HP Downlight line in a popular new pendant form. It's a fabulous solution for open ceilings, with the same aperture and drivers as Hornet HP Downlights—and yet its own distinctive style shines through. Rook 350 Pendant. Simply stunning.



Type: Square Pendant

Wattage: 11, 16, 18 (RD version) or 14, 21 (RLD/RLW version)
Color Temp: 2200K, 2700K, 3000K, 3500K, 4000K, CRISP
CRI: 83 typ. (2700K, 3000K, 3500K, 4000K)


90+ typ. (2200K, 2700K, 3000K, 3500K, 4000K)

CrispWhite & Class A LED available

Dimming: TRIAC & ELV (120V/277V) - 5% Dim

Lutron LDE1 Hi-lume® 1% Soft-On/Fade-to-Black, 120V/277V

0-10V (120V/277V) - 1% Dim

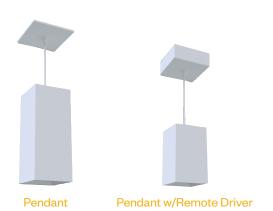

PROJECT:

TYPE:

Surface Mount Conduit Surface Mount

Performance Chart

Watts	Delivered Lumens	LPW	СВСР	Color Temp				
	Rook 350 SD							
11	796	72.4	7,627	3000K-83				
16	1,162	72.6	11,128	3000K-83				
18	1,305	72.5	12,503	3000K-83				
	Rook 350 SLD							
14	1,429	102	2,025	3000K-83				
21	2,133	101.6	3,023	3000K-83				

Data is based on 3000K-83 IES files available on website See pages 5-6 for data on other beam spreads

Electrical Data

	Rook 350 SD						
	11W 16W			18W			
	System Watts	Amps	System Watts	Amps	System Watts	Amps	
120V	11	0.09	16	0.13	18	0.15	
277V	11	0.04	16	0.06	18	0.06	

	Rook 350 SLD					
	14W		21W			
	System Watts	Amps	System Watts	Amps		
120V	14	0.12	21	0.18		
277V	14	0.05	21	0.08		

Electronic constant current LED driver







PROJECT:

Ordering Information

1 3 4 5 6 7 8 9

Model

RK350SD

RK350SD-REMOTE (Remote Driver)

RK350SLD (Lensed)

RK350SLD-REMOTE (Lensed, Remote Driver)

<u>Wattage</u>

RK350SD

RK350SLD

11 16 14

21

18^e

^o Not available for use with CrispWhite color temp

Housing Finish

MW - matte white

MB - matte black

SLV - matte silver

Mounting (matches housing finish)

Canopy/Cord

CC4 - canopy/cord, 4' nominal OAL, 120V-277V

CC8 - canopy/cord, 8' nominal OAL, 120V-277V

CC12 - canopy/cord, 12' nominal OAL, 120V-277V

CDCC4 - conduit canopy/cord, 4' nominal OAL, 120V-277V

CDCC8 - conduit canopy/cord, 8' nominal OAL, 120V-277V

CDCC12 - conduit canopy/cord, 12' nominal OAL, 120V-277V

RS4 - rigid stem, 4' nominal OAL, 120V-277V

RS8 - rigid stem, 8' nominal OAL, 120V-277V

SS4R - swivel stem, 4' nominal OAL, 120V-277V

SS8^R - swivel stem, 8' nominal OAL, 120V-277V

CDRS4 - conduit rigid stem, 4' nominal OAL, 120V-277V

CDRS8 - conduit rigid stem, 8' nominal OAL, 120V-277V

<u>Surface</u>

SM^R - surface mount, 120V-277V

CDSM^R - conduit surface mount, 120V-277V

Track/Cord (for use with LE/TE driver only)

TC8-TN1 R - straight cord 8', Global GES 1cir/H-style, 120V

TC8-TEK R - straight cord 8', Global TEK 2cir/2neut, 120V

TC8-TN3 R - straight cord 8', Global XTS 3cir, 120V

TC8-TN2 R - straight cord 8', Global HTEK 2cir/2neut, 277V

TC8-CT R - straight cord 8', J-style, 120V

TC8-LOL R - straight cord 8', L-style 1cir, 120V

R Not available for use with remote driver

Consult factory for conduit mounting pricing

Cord and Stem mounts are field cuttable

For custom lengths, consult factory

Voltage 5

120*

277*

120-277

* For use with track/cord mounting options

Trim Finish

MW - matte white

MB - matte black

SLV - matte silver

Beam Spreads

RK350SD RK350SLD

SP - spot, 15° 30SOL - 30° solite lens NF - narrow flood, 20° 50SOL - 50° solite lens MFL - medium flood, 24° 65SOL - 65° solite lens 75SAT - 75° satin ice lens FL - flood, 28°

WF - wide flood, 45° VWF - very wide flood, 60° LS - linear spread, 60°x10°

Color Temp 83 CRI

90+ CRI

27 - 2700K-83 229 - 2200K-90+ CRISP* - CrispWhite

 - 3000K-83 - 2700K-90+ - 3500K-83 309 - 3000K-90+ - 4000K-83 359 - 3500K-90+

409 - 4000K-90+

† Not available for 18W (SD model)

Driver

LE/TE - TRIAC/ELV dimming, 5% dim

0-10V - 0-10V dimming; 1% dim

HILUME-H-ECO - Lutron LDE1 Hi-lume® 1% Soft-On/Fade-to-Black

3CLA - 3K Class A



PROJECT: TYPE:

Specifications

Application

Retail and commercial ambient/task lighting

Construction

Extruded aluminum pendant housing Die-cast trim

Extruded aluminum heat sink

Optical

RK350SD Beam Spreads:

Spot, 15°; Narrow Flood, 22°; Medium Flood, 25°; Flood, 28°; Wide Flood, 45°; Very Wide Flood, 60°;

Linear Spread, 60° x 10°

RK350SLD Beam Spreads:

<u>Satin Ice Lens</u> for maximum source concealment and wide distribution with a visually "hotter" aperture. 75° beam spread. <u>Solite Lens</u> for maximum efficacy and a visually quieter aperture. 30°, 50° & 65° beam spread options. Visually best with SLV reflector finish.

LED

Color Temp Options:

2200K, 2700K, 3000K, 3500K, 4000K

CRI: 83 typ. (2700K, 3000K, 3500K, 4000K)

90+ typ. (2200K, 2700K, 3000K, 3500K, 4000K)

CrispWhite* LED available (16W max SD version)

Class A** 3000K LED available

R9 Values: 11 (83 CRI), 55 (92 CRI)

Binning: 3 MacAdam (SDCM)

Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs

*CrispWhite: CrispWhite Technology delivers the warmth of colors expected from a high 90 CRI solution but also creates the natural crisp white color that is pleasing to the eye. It creates the most impactful lighting ever available, by revealing the richest whites and vibrant colors that pop.

**Class A LED: Class A LED's have a CRI > 80 and a GAI > 80. CRI defines color "Naturalness" and GAI defines color "Saturation." Both being high delivers rich colors and pure whites.

Electrical

Wattage: 11, 16, 18 (SD version) or 14, 21 (SLD version) Electronic constant current LED driver, 120V-277V input

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.

Drivers

LE/TE - Leading Edge, TRIAC, forward phase/Trailing Edge, ELV, reverse phase

0-10V and Lutron also available

See pages 8-9 for more dimming information

Finish

Powder coat paint

Consult factory for custom finishes

Mounting

Canopy/cord, rigid stem, swivel stem (not available for use with remote driver) or surface mounting (not available for use with remote driver)

Conduit mounting also available (see pg4 for details).

Overall length (OAL) is field adjustable and factory set at $\pm\,2$ " of nominal value.

Straight cord track mounting also available.

Certifications

CSA tested to UL standards Indoor use only Damp location


Warranty

5 year limited warranty




PROJECT:


Canopy/Cord Mounting

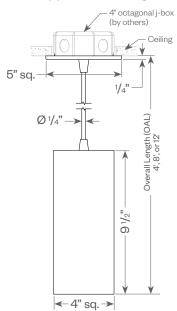

Rigid Stem Mounting

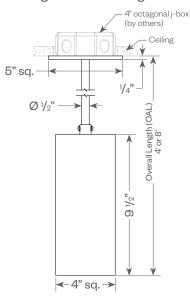


Surface Mounting




Ceiling Cut Out: Ø4 1/4"


Conduit Canopy/Cord Mounting




Conduit Rigid Stem Mounting



Conduit Surface Mounting




Swivel Stem Mounting

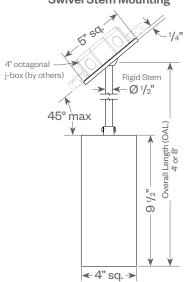

Ceiling Cut Out: Ø4 1/4"


Straight Cord Track Mounting

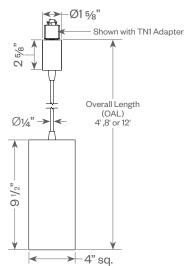

ameriux A Delta Group Company


PROJECT: TYPE:

Remote Driver Canopy/Cord Mounting 4" octagonal j-box (by others)

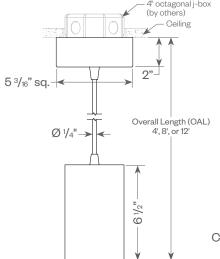


Geiling Gut Out: Ø4 1/4"

Remote Driver Rigid Stem Mounting

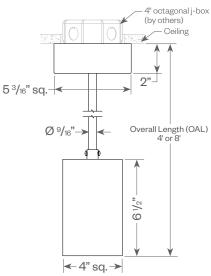


Remote Driver Conduit Canopy/Cord Mounting

← 4" sq. →

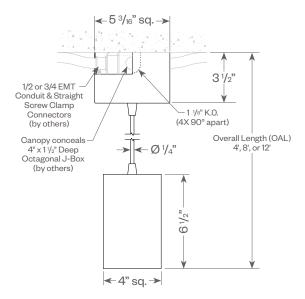

Remote Driver Conduit Rigid Stem Mounting

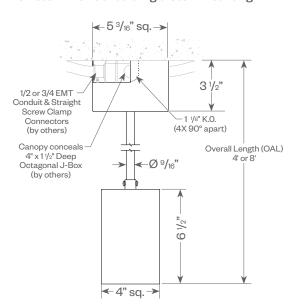



PROJECT:

RK350SD/RK350SD-REMOTE

FIXTURE DATA: (Complete photometric data (.ies format) available upon request)

MULTIPLYING FACTORS: (Multiplying Factor is based on 3000K-83120V IES file on website)

Wattage:	11W	16W	18W
Factor:	0.61	089	1.0


CCT:	2700K-83	3000K-83	3500K-83	4000K-83
Factor:	0.96	1.0	1.02	1.04

CCT:	2200K-90+	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP*	3CLA
Factor:	0.71	0.80	0.83	0.87	0.90	0.65	0.75

* Not available for use with 18W

18W LED, 3000K-83


Spot (SP) Distribution, 15° LTL #818202 Lumens: 1,305



Candelas at Nadir

Deg	Candela
0	12503
5	8267
15	1659
25	185
35	34
45	2


Narrow Flood (NF) Distribution, 22° LTL#818203



Candelas at Nadir

Deg	Candela
0	7621
5	6414
15	1904
25	282
35	49
45	4


Flood (FL) Distribution, 28° LTL # 818205



Candelas at Nadir

Oanucias at Naun				
Deg	Candela			
0	4540			
5	4130			
15	2019			
25	490			
35	81			
45	5			

Wide Flood (WF) Distribution, 45° LTL # 818206



Candelas at Nadir

Deg	Candela
0	2721
5	2581
15	1751
25	712
35	161
45	7

Application Data:

	\triangle		Aiming Horizoi Footcan	ntal
	D	FC	L	W
	5.0'	290	1.9	1.9
Spot	7.5'	161	2.6	2.6
S	10.0'	101	3.1	3.1
	12.5'	69	3.7	3.7
b	D	FC	L	W
<u>ŏ</u>	5.0'	219	2.2	2.2
` ≥	7.5'	114	3.0	3.0
Narrow Flood	10.0'	69	3.8	3.8
R	12.5'	45	4.7	4.7
	D	FC	L	W
0	5.0'	141	2.7	2.7
Flood	7.5'	70	3.7	3.7
됴	10.0'	42	4.9	4.9
	12.5'	27	6.0	6.0
_	D	FC	L	W
Nide Flood	5.0'	97	3.3	3.3
芷	7.5'	46	4.8	4.8
ide	10.0'	26	6.3	6.3
>	12.5'	17	7.7	7.7



Notes and Definitions:

Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).

CB=Distance across or down to center beam location.



PROJECT: TYPE:

RK350SLD/RK350SLD-REMOTE

FIXTURE DATA: (Complete photometric data (.ies format) available upon request)

MULTIPLYING FACTORS: (Multiplying Factor is based on 3000K-83120V IES file on website)


Wattage:	14W	21W
Factor:	0.67	1.0

CCT:	2700K-83	3000K-83	3500K-83	4000K-83
Factor:	0.96	1.0	1.02	1.04


CCT:	2200K-90+	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.66	0.83	0.86	0.90	0.93	0.65	0.70

21W LED, 3000K-83

30° Solite Lens LTL # 13408034.06 Lumens: 2080 lm; 92.1 lm/W




Candelas at Nadir		
Deg	Candela	
0	5191	
5	4959	
15	2524	
25	955	
25	1/11	



Garideias at Nadir		
Deg	Candela	
0	3023	
5	3010	
15	2495	
25	1604	
35	180	
45	66	

Candalas at Nadir



 Candelas at Nadir

 Deg
 Candela

 0
 1537

 5
 1535


 15
 1509

 25
 1305

 35
 479

 45
 267





Candelas at Nadir		
Deg	Candela	
0	1135	
5	1125	
15	1043	
25	880	
35	636	
45	410	

Application Data:

45

Notes and Definitions:

Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.


58

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).

CB=Distance across or down to center beam location.



30° Solite Lens				
0° Aiming Angle Horizontal Footcandles				
D	FC	L	W	
5.0'	208	2.6	2.6	
7.5'	93	3.7	3.8	
10.0'	52	5.0	5.2	
12.5'	34	63	64	

50° Solite Lens 0° Aiming Angle Horizontal Footcandles			
	FC	L	W
5.0'	122	4.1	4.1
7.5'	54	6.1	6.1
10.0'	31	8.2	8.2
12.5'	20	10.3	10.2

65° Solite Lens 0° Aiming Angle Horizontal Footcandles			
D	FC	L	W
5.0'	62	5.2	5.1
7.5'	28	7.9	7.7
10.0'	16	10.6	10.4
12.5'	10	13.4	13.2

	75° Satin Ice Lens 0° Aiming Angle Horizontal Footcandles				
D	FC	L	W		
5.0'	44	5.5	5.5		
7.5'	20	8.1	8.1		
10.0'	12	10.9	10.9		
12.5'	8	14.1	14.0		



PROJECT: TYPE:

DIMMING COMPATIBILITY:

Amerlux® Rook fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc.) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

TRIAC (Forward Phase) DIMMING (Standard)

Utilizes standard TRIAC dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.


Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

Compatible Dimmers[†]:

Wall Box (TRIAC 120VAC)	Central System
	Lutron "GP" Panel
Lutron "Nova-T"	Lutron Grafik Eye QS
Lutron "Maestro"	
Lutron "Skylark"	

TRIAC Wiring Diagram

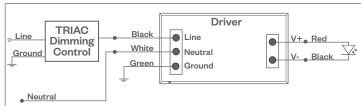


ELV - Electronic Low Voltage (Reverse Phase) DIMMING (Standard)

Utilizes specialized "ELV" dimmers.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions DO NOT SHARE NEUTRALS!
- Must meet dimmer Minimum Load Requirements

ELV Wiring Diagram

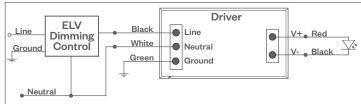

Compatible Dimmers[†]:

Wall Box (ELV 120VAC)	Wall Box (ELV 277VAC)	Central System
Lutron "Diva"	Leviton Revoir II AWSMT-E	Lutron "GP" Panel with PHPM-PA 120/277VAC
Lutron "Nova-T"		Lutron Grafik Eye QS with PHPM-PA 120/277VAC
Lutron "Maestro"		
Lutron "Skylark"		
Leviton "Surslide"		
Leviton "Vizio"		

Notes:

- * Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer manufacturer installation instructions for 277VAC wiring diagrams.
- † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.



PROJECT: TYPE:

DIMMING COMPATIBILITY:

3.5" Square Pendants

Amerlux® Rook fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc.) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V DIMMING

Integrates into a variety of building management and daylighting controls

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- · Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions DO NOT SHARE NEUTRALS!

0-10V Wiring Diagram

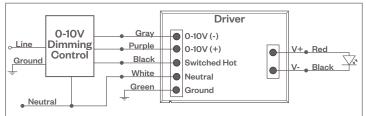

Compatible Dimmers[†]:

Wall Box		Central System
Lutron "Diva" - DVSTV	Leviton Renoir II 0-10V	Lutron Grafik Eye with GRX-TVI Interface

LUTRON LDE1 DIMMING


Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% Soft-On/Fade-to-Black
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions DO NOT SHARE NEUTRALS!

Lutron LDE1 (HILUME-H-ECO)

EcoSystem Digital Control Wiring Diagram

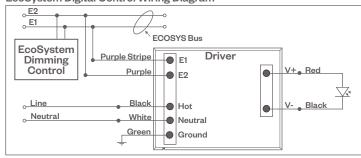

Compatible Dimmers[†]:

Lutron ECO System	Central System
Pow Pak Dimming Modules	Lutron EcoSystem compatible controls
Energi Savr Node	
Grafik Eye QS/Homeworks	
QS Control Unit	
Quantum Hub	
Homeworks QS/My Room	

Notes

- * Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer manufacturer installation instructions for 277VAC wiring diagrams.
- † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.