

# Passo RT

## 12" Soft Glow LED Steplight



PROCS12/BLK

### Features



The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of two output levels to help tailor the desired illuminance to the project and a standard 0-10v dimmable driver allows even further flexibility.

### Product Overview

Wattage:	Up to 9W
Lumen Output:	Up to 376 lm
Color Temp:	2,700K / 3,000K / 4,000K
Dimming:	0-10v down to 10%

### PROJECT:

### TYPE:

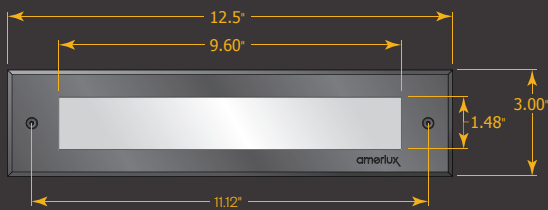

### Application:

Designed for new construction in brick, poured concrete, and hollow walls.

### Construction:

- Electrical grade PVC housing
- Internal optical chamber
- Cast aluminum faceplate
- 1/8" tempered opal glass lens

### Driver:

- Drive Current (175, 350, or 700mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120v-277v auto-sensing
- 0-10v dimmable down to 10%

### ETL listed, suitable for wet locations.

### Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

### Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

<b>ANT</b> - Anthracite Gray	<b>BLK</b> - Satin Black
<b>CLB</b> - Classic Bronze	<b>SLV</b> - Silver
<b>WHT</b> - White	<b>CSTM</b> - Custom



# Passo RT

12" Soft Glow LED Steplight



PROJECT:

TYPE:

## Luminaire Ordering Information



**1** Model  
**PRCS12**

**2** Performance Code  
**L27** - 2,700K / 175mA  
**L30** - 3,000K / 175mA  
**L40** - 4,000K / 175mA  
**H27** - 2,700K / 350mA  
**H30** - 3,000K / 350mA  
**H40** - 4,000K / 350mA  
**VH27** - 2,700K / 700mA  
**VH30** - 3,000K / 700mA  
**VH40** - 4,000K / 700mA

**3** Finish  
**ANT** - Anthracite Gray  
**BLK** - Satin Black  
**CLB** - Classic Bronze  
**SLV** - Silver  
**WHT** - White  
**CSTM** - Custom

## Back Box Ordering Information (Back Box must be ordered separately for a complete unit)

Model  
**RTBX-12**

The backbox can be shipped ahead of the steplight upon request.

# Passo RT


12" Soft Glow LED Steplight



**PROJECT:**


**TYPE:**

## Construction Detail

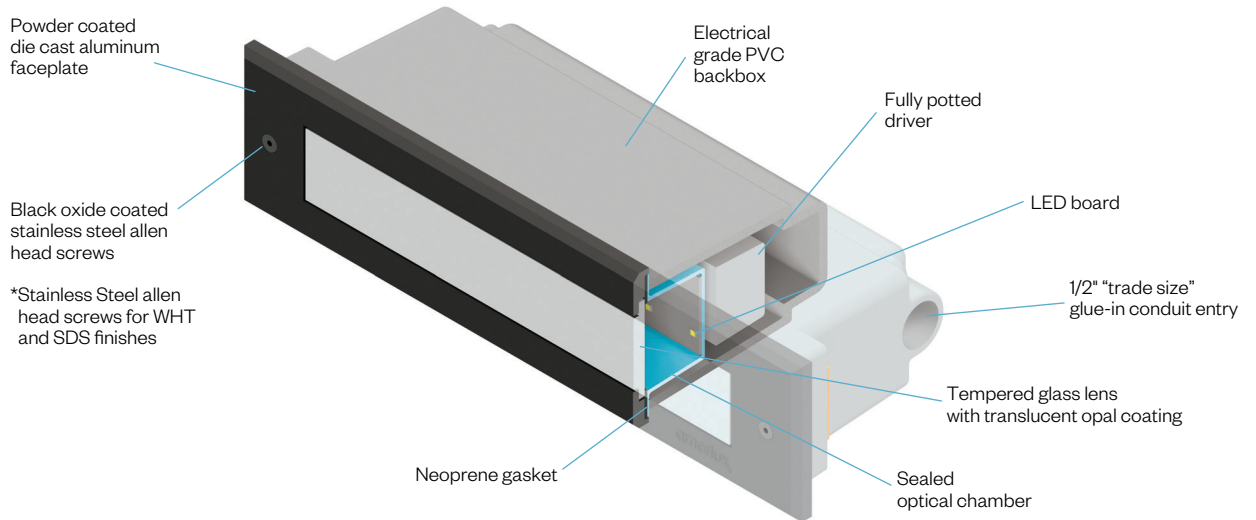


## Application Brackets:

(Included with order)

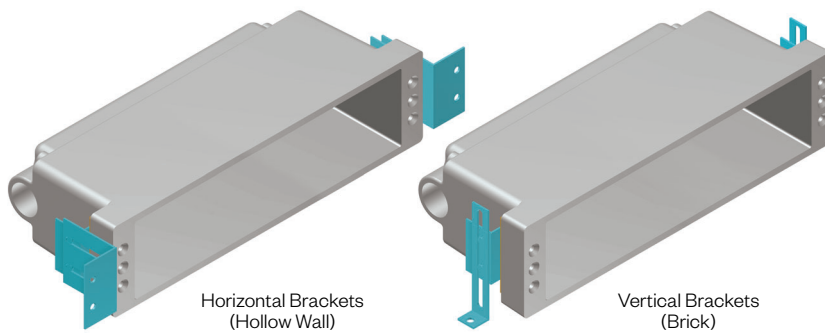

## Performance Detail

PSCS12/L30 POLAR GRAPH



## Performance Chart

Performance Code	OCT	Approx. Lumens	Drive Current	Nominal Input Power
L27	2700 K	98	175mA	3W
L30	3000 K	103		
L40	4000 K	110		
H27	2700 K	190	350mA	4.5W
H30	3000 K	199		
H40	4000 K	212		
VH27	2700 K	337	700mA	9W
VH30	3000 K	353		
VH40	4000 K	376		