

solace



Shallow but not superficial


Solace is the perfect, must-have downlight for interior commercial projects where the reduction of plenum space has become perhaps the greatest design and installation challenge. The shallow plenum downlight offers an extremely low 2 ¼" recessed depth (downlight and wall wash) and a recessed adjustable with recessed depth of just under 3¼ inches. Solace features a sub-3-inch aperture with round and square die cast aperture trims and plenty of flexibility as a downlight, opened or lensed, pinhole, adjustable and as lensed wall wash.






Round


Downlight

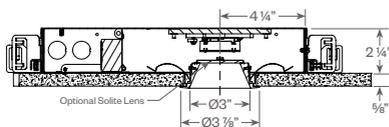


Adjustable

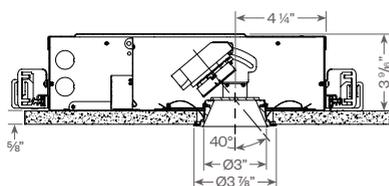


Pinhole Downlight

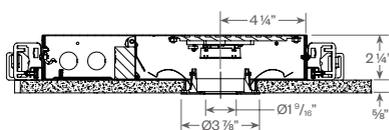


Pinhole Adjustable

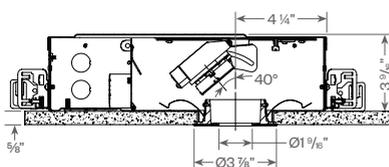

Shower

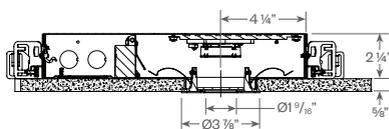

Wall Wash

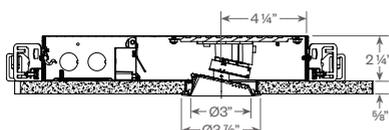

Application:

Commercial, Retail, Hospitality

Our latest LED downlight fits perfectly in an overcrowded plenum with crammed electrical, IT equipment and ducts. Solace solves any surprises and keeps projects on deadline with feature beams—which are easily field interchangeable—ranging from 15-55 degrees. Lensed wall washers provide an even wash down the wall. Recessed adjustables feature 40-degree lockable tilt and rotation. Solace provides over 1,600 lumens and features housings in new construction, airtight IC and Chicago plenum.

SOLACE – Rounds

TYPE: Downlight, Adjustable, Pinhole Downlight, Pinhole Adjustable, Pinhole Shower, Wall Wash

Style: Trim, Trimless, Millwork

Wattage: 8, 12, 17

Delivered Lumens: Up to 1,623

CBCP: Up to 9,443

Binning: 3 MacAdam

Color Temp: 2700K-4000K

CRI: 83 typ, 90+, Crisp White, Class A

Dimming: ELV/TRIAC, 0-10V,

Lutron

Voltage: 120/277

Beam Spreads: 15°–55°

Finish: Matte Black, Matte White, Matte Silver

Accessories: Solite Lens



downlight
(shown w/solite lens)



adjustable



pinhole
downlight



pinhole
adjustable



pinhole
shower



wall wash

SOLACE – Squares

TYPE: Downlight, Adjustable, Pinhole Downlight, Pinhole Adjustable, Pinhole Shower, Wall Wash

Style: Trim, Trimless, Millwork

Wattage: 8, 12, 17

Delivered Lumens: Up to 1,649

CBCP: Up to 7,218

Binning: 3 MacAdam

Color Temp: 2700K-4000K

CRI: 83 typ, 90+, Crisp White, Class A

Dimming: ELV/TRIAC, 0-10V,

Lutron

Voltage: 120/277

Beam Spreads: 15°–55°

Finish: Matte Black, Matte White, Matte Silver

Accessories: Solite Lens

For most updated performance and ordering information visit us at amerlux.com.

© 2020 Amerlux, LLC



downlight
(shown w/solite lens)



adjustable



pinhole
downlight



pinhole
adjustable




pinhole
shower




wall wash

Square


Downlight

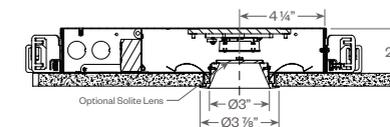


Adjustable

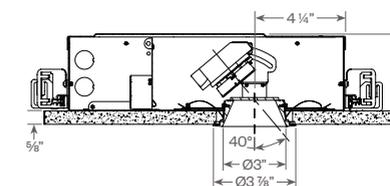


Pinhole Downlight

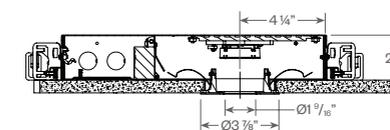


Pinhole Adjustable

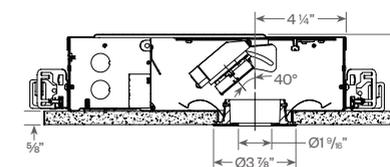

Shower

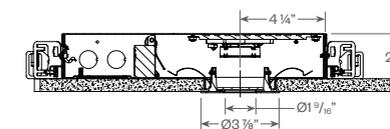

Wall Wash

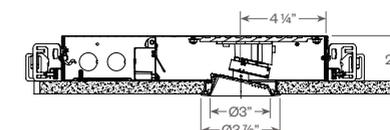

solace





amerlux.com

Headquarters

178 Bauer Drive
Oakland, New Jersey 07436 USA
973.882.5010 | Fax 973.882.2605

China Office

Oxidated Carpark 2nd Floor
No. 124 Donghuan Road, Donghuan Jie
Panyu, Guangzhou PRC 511400